



## GF12160V

### Additional information


<b>Brand</b>	<i>Sonnenschein</i>
<b>Range</b>	<i>Sonnenschein Monoblock Ex Deep Cycle – GEL – 700 cycles</i>
<b>Volts</b>	<i>12</i>
<b>Cap [C5 Ah]</b>	<i>160</i>
<b>Cap [C20 Ah]</b>	<i>196</i>
<b>Weight</b>	<i>62.5 kg</i>
<b>Length</b>	<i>518 mm</i>
<b>Width</b>	<i>274 mm</i>
<b>Height</b>	<i>238 mm</i>
<b>Terminal Type</b>	<i>AP</i>
<b>Technology</b>	<i>GEL</i>
<b>Warranty</b>	<i>12 Months</i>

## Sonnenschein GF12160V

Sonnenschein are known for their high quality dryfit batteries which are ideal for use in a range of deep cycle applications. Offering optimal performance with their high cyclic endurance, they are compact, versatile, and hard wearing. If you need a battery that can withstand extreme operating conditions, Sonnenschein is the ideal choice.

Dryfit technology consists of closed-system batteries in which the electrolyte is fixed in a gel. This means these batteries are totally maintenance free so you will never need to top them up during their lifetime.

The Sonnenschein GF-V Range can be used in a number of applications including cleaning machines, material handling, access platforms and more. If you have any questions about which battery fits your needs, contact Battery Service Hub today and our specialists will be happy to help.

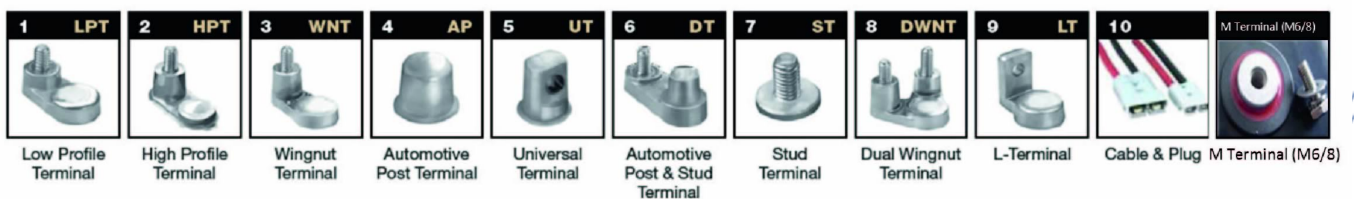


## GF12160V Benefits

- Completely maintenance free
- Robust, safe and reliable
- 700 cycles in accordance with IEC 60254-1
- Low self-discharge rate
- Very high intrinsic safety

## Safety

When operating valve-regulated lead-acid batteries the safety requirements as for vented batteries apply, to protect against hazards from electric current, from explosion of electrolytic gas and (with some limitations) from the corrosive electrolyte. Battery valves should never be removed.

### TERMINALS

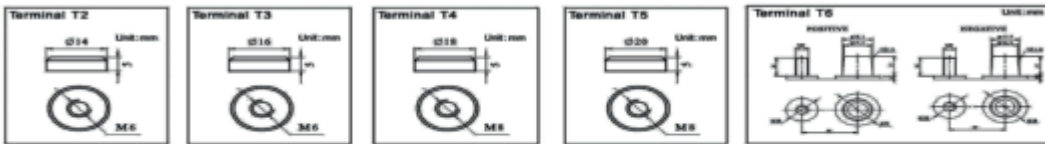

### POSITION OF TERMINALS

